

CooVox-U20

CooVox-U20 is a stylish, compact yet full-featured mini IPPBX system designed for small and micro firms/SOHOs. It is suitable for companies under 30 employees and has all the necessary functionality to fulfill their daily telephony needs.

CooVox-U20 comes equipped with 2 analog ports and optionally a GSM interface, allowing companies the option to deliver inbound/outbound phone calls over PSTN/GSM/SIP Trunk/IMS. With the U20, it is possible to deploy up to 2 EX16S expansion boxes for up to 32 legacy phone deployment. This low-cost IPPBX packs a powerful punch, with a rich feature set that can rival the most expensive of Enterprise solutions in today's market place.



Advantages

✓ Quick Setup Wizard

Quick Setup Wizard allows speedy initial configuration of the U20 system. The wizard includes all essential configuration steps in an easy to use and intuitive web based interface.

✓ Endpoints Provisioning

Quick and simple deployment of endpoint devices using PNP and Quick Register Code. CooCall APP can be provisioned by scanning a QR code.

✓ Extension Web Portal (WebRTC Integrated)

Thanks to the extension web portal, you can now Playback voicemail/recordings online, make/receive phone calls, click to dial, incoming call pop-up, send fax. All of this from within your web browser without installing any plugins.

✓ Email Notifications

SMTP templates allow for simple configuration of mail server. Fax to email, voicemail to email, send QR code via email, system events email notifications, etc.

✓ EX16S Expansion Box Provisioning

Combining CooVox series IPPBX with EX16S Gateways can result in deployment time savings of 90% when deploying large amounts of analog phones.

✓ One Number Stations

The same extension can now be registered on 5 different endpoints. This means that a desktop IP phone and mobile phone APP can share the same extension number so wherever you are, you'll never miss any important calls.

Hardware Specifications

Items	Specifications
Telephony Interfaces	2xRJ11 Interfaces (FXO/FXS); 1xGSM (Optional)
CPU	1GHz ARMv7 Processor
SDRAM	512MB DDR3
Storage	16GB SD Card
USB (Extended Storage Supported)	1 (Supported File System: FAT16,FAT32,EXTFAT,NTFS,EXT3,EXT4)
Ethernet Interface	WAN, LAN (10/100Mbps)
Power	DC 12V, 1A
Dimension	170x116x30 (Desktop based)

Software Specifications

System Capacity	<ul style="list-style-type: none"> ✓ 32 Extensions ✓ 15 Simultaneous Calls ✓ 15 Conference Attendees ✓ 150hrs Recording/Voicemail (Internal Storage) ✓ 2 EX16S Deployment (Recommended) 																												
Protocols & Codecs	<ul style="list-style-type: none"> ✓ SIP(RFC3261), IAX2 ✓ DTMF(RFC4733, SIPINFO, In-Band) ✓ Transport Protocols: UDP, TCP, TLS, SRTP ✓ Video Codecs: VP8, H.264, H.263+, H.263, H.261 ✓ Audio Codecs: Opus, G.722, G.711(a-law, u-law), G.729, G.726, GSM, SPEEX 																												
Telephony Features	<table style="width: 100%; border-collapse: collapse;"> <tr> <td>✓ Call Queue</td> <td>✓ IVR (Multi-layer)</td> <td>✓ DISA</td> <td>✓ Time Conditions</td> </tr> <tr> <td>✓ Ring Group</td> <td>✓ Caller ID</td> <td>✓ Smart DID</td> <td>✓ Paging & Intercom</td> </tr> <tr> <td>✓ Call Forward</td> <td>✓ Call Spy</td> <td>✓ Blacklist</td> <td>✓ One Number Stations</td> </tr> <tr> <td>✓ Call Transfer</td> <td>✓ Video Call</td> <td>✓ Voicemail</td> <td>✓ Music On Ringback</td> </tr> <tr> <td>✓ Call Pickup</td> <td>✓ 3-way Calling</td> <td>✓ Wakeup Call</td> <td>✓ Distinctive Ringtone</td> </tr> <tr> <td>✓ Call Parking</td> <td>✓ Conference Call</td> <td>✓ PIN Code</td> <td>✓ Auto Call Recording</td> </tr> <tr> <td>✓ Call Waiting</td> <td>✓ Follow Me</td> <td>✓ Do Not Disturb</td> <td>✓ One Touch Recording</td> </tr> </table>	✓ Call Queue	✓ IVR (Multi-layer)	✓ DISA	✓ Time Conditions	✓ Ring Group	✓ Caller ID	✓ Smart DID	✓ Paging & Intercom	✓ Call Forward	✓ Call Spy	✓ Blacklist	✓ One Number Stations	✓ Call Transfer	✓ Video Call	✓ Voicemail	✓ Music On Ringback	✓ Call Pickup	✓ 3-way Calling	✓ Wakeup Call	✓ Distinctive Ringtone	✓ Call Parking	✓ Conference Call	✓ PIN Code	✓ Auto Call Recording	✓ Call Waiting	✓ Follow Me	✓ Do Not Disturb	✓ One Touch Recording
✓ Call Queue	✓ IVR (Multi-layer)	✓ DISA	✓ Time Conditions																										
✓ Ring Group	✓ Caller ID	✓ Smart DID	✓ Paging & Intercom																										
✓ Call Forward	✓ Call Spy	✓ Blacklist	✓ One Number Stations																										
✓ Call Transfer	✓ Video Call	✓ Voicemail	✓ Music On Ringback																										
✓ Call Pickup	✓ 3-way Calling	✓ Wakeup Call	✓ Distinctive Ringtone																										
✓ Call Parking	✓ Conference Call	✓ PIN Code	✓ Auto Call Recording																										
✓ Call Waiting	✓ Follow Me	✓ Do Not Disturb	✓ One Touch Recording																										
Feature Highlights	<table style="width: 100%; border-collapse: collapse;"> <tr> <td>✓ Quick Installation Guide</td> <td>✓ Voicemail to Email</td> </tr> <tr> <td>✓ Softphone APP Auto Provisioning (Scan QR Code)</td> <td>✓ Fax to Email</td> </tr> <tr> <td>✓ IP Phone Auto Provisioning (PNP, Quick Register Code)</td> <td>✓ Virtual Fax</td> </tr> <tr> <td>✓ LDAP Phonebook Auto Configure (H81, H83)</td> <td>✓ Click to Dial (WebRTC)</td> </tr> <tr> <td>✓ EX16S Expansion Box Auto Provisioning</td> <td>✓ Call Pop-up (WebRTC)</td> </tr> </table>	✓ Quick Installation Guide	✓ Voicemail to Email	✓ Softphone APP Auto Provisioning (Scan QR Code)	✓ Fax to Email	✓ IP Phone Auto Provisioning (PNP, Quick Register Code)	✓ Virtual Fax	✓ LDAP Phonebook Auto Configure (H81, H83)	✓ Click to Dial (WebRTC)	✓ EX16S Expansion Box Auto Provisioning	✓ Call Pop-up (WebRTC)																		
✓ Quick Installation Guide	✓ Voicemail to Email																												
✓ Softphone APP Auto Provisioning (Scan QR Code)	✓ Fax to Email																												
✓ IP Phone Auto Provisioning (PNP, Quick Register Code)	✓ Virtual Fax																												
✓ LDAP Phonebook Auto Configure (H81, H83)	✓ Click to Dial (WebRTC)																												
✓ EX16S Expansion Box Auto Provisioning	✓ Call Pop-up (WebRTC)																												
Multi-level User Administration	<ul style="list-style-type: none"> ✓ Admin user: All Privileges. ✓ Operator user: Manage extensions, general features, faxes, CDR, call recordings, etc. ✓ Extension user: WebRTC, extension recording, extension voicemail, extension call logs, etc. 																												
Security	<ul style="list-style-type: none"> ✓ Firewall based on iptables ✓ Geo-IP (Security policy based on IP address geographical location) ✓ Intrusion auto detection and prevention 																												
Network Features	<ul style="list-style-type: none"> ✓ Network Mode (WAN): Static IP, DHCP ✓ VPN: PPTP (Server and Client), OpenVPN (Server and Client) ✓ Static Routing ✓ DHCP (Server and Client) ✓ DDNS (Dynamic Domain Name Server) 																												

ZYCOO CO., LTD

Add: 16F, D5, Tianfu Software Park, Chengdu, China

Tel: +86(28)85337096

Email: zycoo@zycoo.com

Website: www.zycoo.com





CooVox-U50 IP Phone System

for Small and Medium Businesses



No User License Fee

All Standard PBX Features

Many Advanced PBX Features

Desktop Call Management

Firewall

Intrusion Detection

Enhanced Security Policies

Remote Backup Service

Disaster Recovery



The CooVox-U50 IP Phone System is an ideal solution for small and medium business with up to 100 extensions. Adopting the innovative modular design, it is very convenient to increase telephony ports to expand the system. CooVox-U50 supports industry standard SIP trunks, analog PSTN trunks (FXO Module), analog stations (FXS Module), and mobile GSM/WCDMA trunks (GSM/WCDMA Module).


CooVox-U50 is a next-generation Hybrid IP PBX System designed and optimized for today's business telecommunication needs. CooVox-U50 is an affordable, scalable, interoperable, secure and reliable solution which provides not only traditional PBX features such as Automated Attendant and Voicemail, but also many advanced features including Remote Extensions, Remote Office Connection, Conference Bridge, Call Recording, Call Detail Records (CDR), Automatic Call Distribution (ACD), Unified Messaging (Voicemail to Email), Web Dial and many more features.

Highlights & Features

- Fax to Email
- WebRTC/ Web Dial
- Voicemail to Email
- Console Port for easy management
- Stronger Security to Protect System

Telephony Configuration

Module	Slot 1	Slot 2
4FXS	✓	✓
4FXO	✓	✓
2FXOS	✓	✓
2GSM	✓	✓
4GSM	✓	✓
2WCDMA	✓	✓
4WCDMA	✓	✓

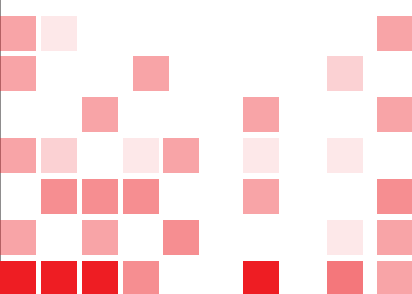

System Specifications

Call Features

Call Back
Call Forward
Call Group
Call Hold
Call Paging and Intercom
Call Park
Call Pickup
Call Queue
Call Recording
Call Routing
Blind Transfer
Attendant Transfer
Call Waiting
Caller ID
Dial by Name
Music On Hold/Transfer
3-Way Conference
Video Calls

PBX Features

Black List
BLF (Busy Lamp Field)
CDR (Call Detailed Record)
Conference Room (20 Rooms)
Call Monitoring
DID (Direct Inward Dialing Number)
DISA (Direct Inward System Access)
Distinctive Ringtone
DND (Do Not Disturb)
DNIS (Dialed Number Identification Service)
Feature Codes
FOP (Flash Operation Panel) Status Monitoring
Follow Me
IVR (Interactive Voice Responses)
Mobility Extension
Multi-Language Prompts
Multi-Language GUI
One Touch Recording
Phone Book(LDAP Server)
Phone Provisioning
Pin Set
Record File Download
Ringgroup
SIP Register with UDP/TCP/TLS
SIP Trunk
Skype for SIP
Smart DID
Speed Dial
Spy
SRTP (Secure Realtime Transport Protocol)
T.38 Fax (Pass-through)
Time Based Rule
Fax to Email
WebRTC/ Web Dial
Voicemail & Voicemail to Email

System Capacities

30 Concurrent Calls
Up to 100 IP Phone Registers/Extensions
Recording: 36,000 mins (.gsm); 4,000 mins (.wav)
Voicemail: 36,000 mins (.gsm); 4,000 mins (.wav)

Codex & Protocols

Audio Codex: G.722/G.711-Ulaw/G.711-Alaw/
G.726/G.729/GSM/SPEEX
Video Codex: H.261/H.263/H.263+/H.264
Protocols: SIP (RFC3261)/IAX2
DTMF: RFC2833/SIP INFO/In-Band

Network Features

DDNS Client
DHCP Server
IPv4/IPv6/IEEE802.1Q
IP Assignment (PPPoE/DHCP/Static)
SNMP v1/v2
TR069
Static Route Table
Trouble Shooting (Ping/Traceroute)
VPN Client (L2TP/PPTP/OpenVPN/N2N/IPSec)
VPN Server (L2TP/PPTP/OpenVPN/IPSec)

Security Features

Refuse SIP Register DoS
Refuse Abort Invite DoS
Refuse SSH Login DoS
Firewall

Logs

PBX Log
Web Access Log
PBX Debug Log

Hardware Interfaces

1 Reset Button
1 Power Interface
2 Ethernet Interfaces
1 Console Interface
1 USB Interface
Slot 1/2 for Analog/GSM/WCDMA Module

Hardware Specifications

Processor: Dualcore A7 1Ghz
SDRAM: DDR3 1GB
Storage: 8GB SD Card
Power Supply: Input AC 100~240V, 50/60Hz;
Output DC 12V/2A

Environment

Working Temperature: 0 ~ 40°C
Storage Temperature: -20 ~ 55°C
Humidity: 5 ~ 95% Non-condensing

Packings

Dimension: 280 × 150 × 65mm
Weight/Unit: 0.8kg
Unit/Carton: 10 Units
Weight/Carton: 10kg





CooVox-U60

CooVox-U60 is a hybrid IPPBX system designed specifically by ZYCOO for the SMB market. It provides 24 analog ports that can accommodate up to 24 PSTN lines. In addition, it can host up to 12 EX16S expansion boxes to deploy up to 192 legacy phones. This makes the CooVox-U60 an ideal solution for customers who want to refresh their phone system using IPPBX, PSTN lines and their existing legacy phones.

The U60 combines all of the features available to a legacy PBX system with the added benefits you get from a fully featured enterprise class VoIP IPPBX solution.



Advantages

✓ Quick Setup Wizard

Quick Setup Wizard allows speedy initial configuration of the U60 system. The wizard includes all essential configuration steps in an easy to use and intuitive web based interface.

✓ Endpoints Provisioning

Quick and simple deployment of endpoint devices using PNP and Quick Register Code. CooCall APP can be provisioned by scanning a QR code.

✓ Extension Web Portal (WebRTC Integrated)

Thanks to the extension web portal, you can now Playback voicemail/recordings online, make/receive phone calls, click to dial, incoming call pop-up, send fax. All of this from within your web browser without installing any plugins.

✓ Email Notifications

SMTP templates allow for simple configuration of mail server. Fax to email, voicemail to email, send QR code via email, system events email notifications, etc.

✓ EX16S Expansion Box Provisioning

Combining CooVox series IPPBX with EX16S Gateways can result in deployment time savings of 90% when deploying large amounts of analog phones

✓ One Number Stations

The same extension can now be registered on 5 different endpoints. This means that a desktop IP phone and mobile phone APP can share the same extension number so wherever you are, you'll never miss any important calls.

Hardware Specifications

Items	Specifications
Telephony Interfaces	24xRJ11 Interfaces (FXO/FXS)
CPU	2.41GHz Dual-core Intel Processor
RAM	2GB DDR3L
Storage	16GB EMMC
USB (Extended Storage Supported)	2 (Supported File System: FAT16,FAT32,EXTFAT,NTFS,EXT3,EXT4)
Ethernet Interface	WAN, LAN (10/100/1000Mbps)
Power	AC 100-240V, Max. 1.5A
Dimension	440x222x44mm (19" 1U industry standard rack-mountable chassis)

Software Specifications

System Capacity	<ul style="list-style-type: none"> ✓ 200 Extensions ✓ 60 Simultaneous Calls ✓ 60 Conference Attendees ✓ 150hrs Recording/Voicemail (Internal Storage) ✓ 12 EX16S Deployment (Recommended) 																												
Protocols & Codecs	<ul style="list-style-type: none"> ✓ SIP(RFC3261), IAX2 ✓ DTMF(RFC4733, SIPINFO, In-Band) ✓ Transport Protocols: UDP, TCP, TLS, SRTP ✓ Video Codecs: VP8, H.264, H.263+, H.263, H.261 ✓ Audio Codecs: Opus, G.722, G.711(a-law, u-law), G.729, G.726, GSM, SPEEX 																												
Telephony Features	<table style="width: 100%; border-collapse: collapse;"> <tr> <td>✓ Call Queue</td> <td>✓ IVR (Multi-layer)</td> <td>✓ DISA</td> <td>✓ Time Conditions</td> </tr> <tr> <td>✓ Ring Group</td> <td>✓ Caller ID</td> <td>✓ Smart DID</td> <td>✓ Paging & Intercom</td> </tr> <tr> <td>✓ Call Forward</td> <td>✓ Call Spy</td> <td>✓ Blacklist</td> <td>✓ One Number Stations</td> </tr> <tr> <td>✓ Call Transfer</td> <td>✓ Video Call</td> <td>✓ Voicemail</td> <td>✓ Music On Ringback</td> </tr> <tr> <td>✓ Call Pickup</td> <td>✓ 3-way Calling</td> <td>✓ Wakeup Call</td> <td>✓ Distinctive Ringtone</td> </tr> <tr> <td>✓ Call Parking</td> <td>✓ Conference Call</td> <td>✓ PIN Code</td> <td>✓ Auto Call Recording</td> </tr> <tr> <td>✓ Call Waiting</td> <td>✓ Follow Me</td> <td>✓ Do Not Disturb</td> <td>✓ One Touch Recording</td> </tr> </table>	✓ Call Queue	✓ IVR (Multi-layer)	✓ DISA	✓ Time Conditions	✓ Ring Group	✓ Caller ID	✓ Smart DID	✓ Paging & Intercom	✓ Call Forward	✓ Call Spy	✓ Blacklist	✓ One Number Stations	✓ Call Transfer	✓ Video Call	✓ Voicemail	✓ Music On Ringback	✓ Call Pickup	✓ 3-way Calling	✓ Wakeup Call	✓ Distinctive Ringtone	✓ Call Parking	✓ Conference Call	✓ PIN Code	✓ Auto Call Recording	✓ Call Waiting	✓ Follow Me	✓ Do Not Disturb	✓ One Touch Recording
✓ Call Queue	✓ IVR (Multi-layer)	✓ DISA	✓ Time Conditions																										
✓ Ring Group	✓ Caller ID	✓ Smart DID	✓ Paging & Intercom																										
✓ Call Forward	✓ Call Spy	✓ Blacklist	✓ One Number Stations																										
✓ Call Transfer	✓ Video Call	✓ Voicemail	✓ Music On Ringback																										
✓ Call Pickup	✓ 3-way Calling	✓ Wakeup Call	✓ Distinctive Ringtone																										
✓ Call Parking	✓ Conference Call	✓ PIN Code	✓ Auto Call Recording																										
✓ Call Waiting	✓ Follow Me	✓ Do Not Disturb	✓ One Touch Recording																										
Feature Highlights	<table style="width: 100%; border-collapse: collapse;"> <tr> <td>✓ Quick Installation Guide</td> <td>✓ Voicemail to Email</td> </tr> <tr> <td>✓ Softphone APP Auto Provisioning (Scan QR Code)</td> <td>✓ Fax to Email</td> </tr> <tr> <td>✓ IP Phone Auto Provisioning (PNP, Quick Register Code)</td> <td>✓ Virtual Fax</td> </tr> <tr> <td>✓ LDAP Phonebook Auto Configure (H81, H83)</td> <td>✓ Click to Dial (WebRTC)</td> </tr> <tr> <td>✓ EX16S Expansion Box Auto Provisioning</td> <td>✓ Call Pop-up (WebRTC)</td> </tr> </table>	✓ Quick Installation Guide	✓ Voicemail to Email	✓ Softphone APP Auto Provisioning (Scan QR Code)	✓ Fax to Email	✓ IP Phone Auto Provisioning (PNP, Quick Register Code)	✓ Virtual Fax	✓ LDAP Phonebook Auto Configure (H81, H83)	✓ Click to Dial (WebRTC)	✓ EX16S Expansion Box Auto Provisioning	✓ Call Pop-up (WebRTC)																		
✓ Quick Installation Guide	✓ Voicemail to Email																												
✓ Softphone APP Auto Provisioning (Scan QR Code)	✓ Fax to Email																												
✓ IP Phone Auto Provisioning (PNP, Quick Register Code)	✓ Virtual Fax																												
✓ LDAP Phonebook Auto Configure (H81, H83)	✓ Click to Dial (WebRTC)																												
✓ EX16S Expansion Box Auto Provisioning	✓ Call Pop-up (WebRTC)																												
Multi-level User Administration	<ul style="list-style-type: none"> ✓ Admin user: All Privileges. ✓ Operator user: Manage extensions, general features, faxes, CDR, call recordings, etc. ✓ Extension user: WebRTC, extension recording, extension voicemail, extension call logs, etc. 																												
Security	<ul style="list-style-type: none"> ✓ Firewall based on iptables ✓ Geo-IP (Security policy based on IP address geographical location) ✓ Intrusion auto detection and prevention 																												
Network Features	<ul style="list-style-type: none"> ✓ Network Mode (WAN): Static IP, DHCP ✓ VPN: PPTP (Server and Client), OpenVPN (Server and Client) ✓ Static Routing ✓ DHCP (Server and Client) ✓ DDNS (Dynamic Domain Name Server) 																												

ZYCOO CO., LTD

Add: 16F, D5, Tianfu Software Park, Chengdu, China

Tel: +86(28)85337096

Email: zycoo@zycoo.com

Website: www.zycoo.com





CooVox-U80

CooVox-U80 is a next-generation IPPBX system designed for medium to large enterprises. It is a truly powerful hardware platform and supports PSTN/GSM/WCDMA trunks, ISDN E1/T1 and BRI digital trunk lines. Through its innovative software features, CooVox-U80 allows for enterprise grade unified VoIP communications.

CooVox-U80 is suitable for enterprises requiring 100 to 200 extensions and a maximum of 60 concurrent calls. It's an affordable, scalable, interoperable, secure and reliable choice for you to build your own innovative VoIP solutions.



Advantages

✓ Quick Setup Wizard

Quick Setup Wizard allows speedy initial configuration of the U80 system. The wizard includes all essential configuration steps in an easy to use and intuitive web based interface.

✓ Endpoints Provisioning

Quick and simple deployment of endpoint devices using PNP and Quick Register Code. CooCall APP can be provisioned by scanning a QR code.

✓ Extension Web Portal (WebRTC Integrated)

Thanks to the extension web portal, you can now Playback voicemail/recordings online, make/receive phone calls, click to dial, incoming call pop-up, send fax. All of this from within your web browser without installing any plugins.

✓ Email Notifications

SMTP templates allow for simple configuration of mail server. Fax to email, voicemail to email, send QR code via email, system events email notifications, etc.

✓ EX16S Expansion Box Provisioning

Combining CooVox series IPPBX with EX16S Gateways can result in deployment time savings of 90% when deploying large amounts of analog phones.

✓ One Number Stations

The same extension can now be registered on 5 different endpoints. This means that a desktop IP phone and mobile phone APP can share the same extension number so wherever you are, you'll never miss any important calls.

Hardware Specifications

Items	Specifications
Telephony Interfaces	8xFXO/FXS/GSM/WCDMA, 2xE1/T1, 4xBRI Interfaces
CPU	2.41GHz Dual-core Intel Processor
RAM	2GB DDR3L
Storage	16GB EMMC
USB (Extended Storage Supported)	2 (Supported File System: FAT16,FAT32,EXTFAT,NTFS,EXT3,EXT4)
Ethernet Interface	WAN, LAN (10/100/1000Mbps)
Power	AC 100-240V, Max. 1.5A
Dimension	440x222x44mm (19" 1U industry standard rack-mountable chassis)

Software Specifications

System Capacity	<ul style="list-style-type: none"> ✓ 200 Extensions ✓ 60 Simultaneous Calls ✓ 60 Conference Attendees ✓ 150hrs Recording/Voicemail (Internal Storage) ✓ 12 EX16S Deployment (Recommended) 																												
Protocols & Codecs	<ul style="list-style-type: none"> ✓ SIP(RFC3261), IAX2 ✓ DTMF(RFC4733, SIPINFO, In-Band) ✓ Transport Protocols: UDP, TCP, TLS, SRTP ✓ Video Codecs: VP8, H.264, H.263+, H.263, H.261 ✓ Audio Codecs: Opus, G.722, G.711(a-law, u-law), G.729, G.726, GSM, SPEEX 																												
Telephony Features	<table style="width: 100%; border-collapse: collapse;"> <tr> <td>✓ Call Queue</td> <td>✓ IVR (Multi-layer)</td> <td>✓ DISA</td> <td>✓ Time Conditions</td> </tr> <tr> <td>✓ Ring Group</td> <td>✓ Caller ID</td> <td>✓ Smart DID</td> <td>✓ Paging & Intercom</td> </tr> <tr> <td>✓ Call Forward</td> <td>✓ Call Spy</td> <td>✓ Blacklist</td> <td>✓ One Number Stations</td> </tr> <tr> <td>✓ Call Transfer</td> <td>✓ Video Call</td> <td>✓ Voicemail</td> <td>✓ Music On Ringback</td> </tr> <tr> <td>✓ Call Pickup</td> <td>✓ 3-way Calling</td> <td>✓ Wakeup Call</td> <td>✓ Distinctive Ringtone</td> </tr> <tr> <td>✓ Call Parking</td> <td>✓ Conference Call</td> <td>✓ PIN Code</td> <td>✓ Auto Call Recording</td> </tr> <tr> <td>✓ Call Waiting</td> <td>✓ Follow Me</td> <td>✓ Do Not Disturb</td> <td>✓ One Touch Recording</td> </tr> </table>	✓ Call Queue	✓ IVR (Multi-layer)	✓ DISA	✓ Time Conditions	✓ Ring Group	✓ Caller ID	✓ Smart DID	✓ Paging & Intercom	✓ Call Forward	✓ Call Spy	✓ Blacklist	✓ One Number Stations	✓ Call Transfer	✓ Video Call	✓ Voicemail	✓ Music On Ringback	✓ Call Pickup	✓ 3-way Calling	✓ Wakeup Call	✓ Distinctive Ringtone	✓ Call Parking	✓ Conference Call	✓ PIN Code	✓ Auto Call Recording	✓ Call Waiting	✓ Follow Me	✓ Do Not Disturb	✓ One Touch Recording
✓ Call Queue	✓ IVR (Multi-layer)	✓ DISA	✓ Time Conditions																										
✓ Ring Group	✓ Caller ID	✓ Smart DID	✓ Paging & Intercom																										
✓ Call Forward	✓ Call Spy	✓ Blacklist	✓ One Number Stations																										
✓ Call Transfer	✓ Video Call	✓ Voicemail	✓ Music On Ringback																										
✓ Call Pickup	✓ 3-way Calling	✓ Wakeup Call	✓ Distinctive Ringtone																										
✓ Call Parking	✓ Conference Call	✓ PIN Code	✓ Auto Call Recording																										
✓ Call Waiting	✓ Follow Me	✓ Do Not Disturb	✓ One Touch Recording																										
Feature Highlights	<table style="width: 100%; border-collapse: collapse;"> <tr> <td>✓ Quick Installation Guide</td> <td>✓ Voicemail to Email</td> </tr> <tr> <td>✓ Softphone APP Auto Provisioning (Scan QR Code)</td> <td>✓ Fax to Email</td> </tr> <tr> <td>✓ IP Phone Auto Provisioning (PNP, Quick Register Code)</td> <td>✓ Virtual Fax</td> </tr> <tr> <td>✓ LDAP Phonebook Auto Configure (H81, H83)</td> <td>✓ Click to Dial (WebRTC)</td> </tr> <tr> <td>✓ EX16S Expansion Box Auto Provisioning</td> <td>✓ Call Pop-up (WebRTC)</td> </tr> </table>	✓ Quick Installation Guide	✓ Voicemail to Email	✓ Softphone APP Auto Provisioning (Scan QR Code)	✓ Fax to Email	✓ IP Phone Auto Provisioning (PNP, Quick Register Code)	✓ Virtual Fax	✓ LDAP Phonebook Auto Configure (H81, H83)	✓ Click to Dial (WebRTC)	✓ EX16S Expansion Box Auto Provisioning	✓ Call Pop-up (WebRTC)																		
✓ Quick Installation Guide	✓ Voicemail to Email																												
✓ Softphone APP Auto Provisioning (Scan QR Code)	✓ Fax to Email																												
✓ IP Phone Auto Provisioning (PNP, Quick Register Code)	✓ Virtual Fax																												
✓ LDAP Phonebook Auto Configure (H81, H83)	✓ Click to Dial (WebRTC)																												
✓ EX16S Expansion Box Auto Provisioning	✓ Call Pop-up (WebRTC)																												
Multi-level User Administration	<ul style="list-style-type: none"> ✓ Admin user: All Privileges. ✓ Operator user: Manage extensions, general features, faxes, CDR, call recordings, etc. ✓ Extension user: WebRTC, extension recording, extension voicemail, extension call logs, etc. 																												
Security	<ul style="list-style-type: none"> ✓ Firewall based on iptables ✓ Geo-IP (Security policy based on IP address geographical location) ✓ Intrusion auto detection and prevention 																												
Network Features	<ul style="list-style-type: none"> ✓ Network Mode (WAN): Static IP, DHCP ✓ VPN: PPTP (Server and Client), OpenVPN (Server and Client) ✓ Static Routing ✓ DHCP (Server and Client) ✓ DDNS (Dynamic Domain Name Server) 																												

ZYCOO CO., LTD

Add: 16F, D5, Tianfu Software Park, Chengdu, China

Tel: +86(28)85337096

Email: zycoo@zycoo.com

Website: www.zycoo.com





CooVox-U100

CooVox-U100 is a high-end, heavy-duty and yet cost-effective enterprise-grade IPPBX system for medium to large enterprises. It is a fully featured IPPBX system with high system capacity, allowing the CooVox-U100 to fulfill a business's existing telecommunication needs while also providing future growth options and all of this without additional license fees.

CooVox-U100 is ideal for those enterprises which have a demanding telephony environment, as it supports up to 500 extensions, 100 simultaneous calls, 100 simultaneous conference attendees, up to 7500 hours call recording. All features are available to use with no additional license fees.



Advantages

✓ Quick Setup Wizard

Quick Setup Wizard allows speedy initial configuration of the U100 system. The wizard includes all essential configuration steps in an easy to use and intuitive web based interface.

✓ Endpoints Provisioning

Quick and simple deployment of endpoint devices using PNP and Quick Register Code. CooCall APP can be provisioned by scanning a QR code.

✓ Extension Web Portal (WebRTC Integrated)

Thanks to the extension web portal, you can now Playback voicemail/recordings online, make/receive phone calls, click to dial, incoming call pop-up, send fax. All of this from within your web browser without installing any plugins.

✓ Email Notifications

SMTP templates allow for simple configuration of mail server. Fax to email, voicemail to email, send QR code via email, system events email notifications, etc.

✓ EX16S Expansion Box Provisioning

Combining CooVox series IPPBX with EX16S Gateways can result in deployment time savings of 90% when deploying large amounts of analog phones

✓ One Number Stations

The same extension can now be registered on 5 different endpoints. This means that a desktop IP phone and mobile phone APP can share the same extension number so wherever you are, you'll never miss any important calls.

Hardware Specifications

Items	Specifications
Telephony Interfaces	8xFXO/FXS/GSM/WCDMA, 2xE1/T1, 4xBRI Interfaces
CPU	2.41GHz Dual-core Intel Processor
RAM	4GB DDR3L
Storage	16GB EMMC + 500GB HDD
USB (Extended Storage Supported)	2 (Supported File System: FAT16,FAT32,EXTFAT,NTFS,EXT3,EXT4)
Ethernet Interface	WAN, LAN (10/100/1000Mbps)
Power	AC 100-240V, Max. 1.5A
Dimension	440x222x44mm (19" 1U industry standard rack-mountable chassis)

Software Specifications

System Capacity	<ul style="list-style-type: none"> ✓ 500 Extensions ✓ 100 Simultaneous Calls ✓ 100 Conference Attendees ✓ 7500hrs Recording/Voicemail (Internal Storage) ✓ 31 EX16S Deployment (Recommended) 																												
Protocols & Codecs	<ul style="list-style-type: none"> ✓ SIP(RFC3261), IAX2 ✓ DTMF(RFC4733, SIPINFO, In-Band) ✓ Transport Protocols: UDP, TCP, TLS, SRTP ✓ Video Codecs: VP8, H.264, H.263+, H.263, H.261 ✓ Audio Codecs: Opus, G.722, G.711(a-law, u-law), G.729, G.726, GSM, SPEEX 																												
Telephony Features	<table style="width: 100%; border: none;"> <tr> <td>✓ Call Queue</td> <td>✓ IVR (Multi-layer)</td> <td>✓ DISA</td> <td>✓ Time Conditions</td> </tr> <tr> <td>✓ Ring Group</td> <td>✓ Caller ID</td> <td>✓ Smart DID</td> <td>✓ Paging & Intercom</td> </tr> <tr> <td>✓ Call Forward</td> <td>✓ Call Spy</td> <td>✓ Blacklist</td> <td>✓ One Number Stations</td> </tr> <tr> <td>✓ Call Transfer</td> <td>✓ Video Call</td> <td>✓ Voicemail</td> <td>✓ Music On Ringback</td> </tr> <tr> <td>✓ Call Pickup</td> <td>✓ 3-way Calling</td> <td>✓ Wakeup Call</td> <td>✓ Distinctive Ringtone</td> </tr> <tr> <td>✓ Call Parking</td> <td>✓ Conference Call</td> <td>✓ PIN Code</td> <td>✓ Auto Call Recording</td> </tr> <tr> <td>✓ Call Waiting</td> <td>✓ Follow Me</td> <td>✓ Do Not Disturb</td> <td>✓ One Touch Recording</td> </tr> </table>	✓ Call Queue	✓ IVR (Multi-layer)	✓ DISA	✓ Time Conditions	✓ Ring Group	✓ Caller ID	✓ Smart DID	✓ Paging & Intercom	✓ Call Forward	✓ Call Spy	✓ Blacklist	✓ One Number Stations	✓ Call Transfer	✓ Video Call	✓ Voicemail	✓ Music On Ringback	✓ Call Pickup	✓ 3-way Calling	✓ Wakeup Call	✓ Distinctive Ringtone	✓ Call Parking	✓ Conference Call	✓ PIN Code	✓ Auto Call Recording	✓ Call Waiting	✓ Follow Me	✓ Do Not Disturb	✓ One Touch Recording
✓ Call Queue	✓ IVR (Multi-layer)	✓ DISA	✓ Time Conditions																										
✓ Ring Group	✓ Caller ID	✓ Smart DID	✓ Paging & Intercom																										
✓ Call Forward	✓ Call Spy	✓ Blacklist	✓ One Number Stations																										
✓ Call Transfer	✓ Video Call	✓ Voicemail	✓ Music On Ringback																										
✓ Call Pickup	✓ 3-way Calling	✓ Wakeup Call	✓ Distinctive Ringtone																										
✓ Call Parking	✓ Conference Call	✓ PIN Code	✓ Auto Call Recording																										
✓ Call Waiting	✓ Follow Me	✓ Do Not Disturb	✓ One Touch Recording																										
Feature Highlights	<table style="width: 100%; border: none;"> <tr> <td>✓ Quick Installation Guide</td> <td>✓ Voicemail to Email</td> </tr> <tr> <td>✓ Softphone APP Auto Provisioning (Scan QR Code)</td> <td>✓ Fax to Email</td> </tr> <tr> <td>✓ IP Phone Auto Provisioning (PNP, Quick Register Code)</td> <td>✓ Virtual Fax</td> </tr> <tr> <td>✓ LDAP Phonebook Auto Configure (H81, H83)</td> <td>✓ Click to Dial (WebRTC)</td> </tr> <tr> <td>✓ EX16S Expansion Box Auto Provisioning</td> <td>✓ Call Pop-up (WebRTC)</td> </tr> </table>	✓ Quick Installation Guide	✓ Voicemail to Email	✓ Softphone APP Auto Provisioning (Scan QR Code)	✓ Fax to Email	✓ IP Phone Auto Provisioning (PNP, Quick Register Code)	✓ Virtual Fax	✓ LDAP Phonebook Auto Configure (H81, H83)	✓ Click to Dial (WebRTC)	✓ EX16S Expansion Box Auto Provisioning	✓ Call Pop-up (WebRTC)																		
✓ Quick Installation Guide	✓ Voicemail to Email																												
✓ Softphone APP Auto Provisioning (Scan QR Code)	✓ Fax to Email																												
✓ IP Phone Auto Provisioning (PNP, Quick Register Code)	✓ Virtual Fax																												
✓ LDAP Phonebook Auto Configure (H81, H83)	✓ Click to Dial (WebRTC)																												
✓ EX16S Expansion Box Auto Provisioning	✓ Call Pop-up (WebRTC)																												
Multi-level User Administration	<ul style="list-style-type: none"> ✓ Admin user: All Privileges. ✓ Operator user: Manage extensions, general features, faxes, CDR, call recordings, etc. ✓ Extension user: WebRTC, extension recording, extension voicemail, extension call logs, etc. 																												
Security	<ul style="list-style-type: none"> ✓ Firewall based on iptables ✓ Geo-IP (Security policy based on IP address geographical location) ✓ Intrusion auto detection and prevention 																												
Network Features	<ul style="list-style-type: none"> ✓ Network Mode (WAN): Static IP, DHCP ✓ VPN: PPTP (Server and Client), OpenVPN (Server and Client) ✓ Static Routing ✓ DHCP (Server and Client) ✓ DDNS (Dynamic Domain Name Server) 																												

ZYCOO CO., LTD

Add: 16F, D5, Tianfu Software Park, Chengdu, China

Tel: +86(28)85337096

Email: zycoo@zycoo.com

Website: www.zycoo.com



CooFone H81 IP Phone

The CooFone-H81/H81P IP Phone is an all-new entry-level desktop IP phone. With 2-line SIP accounts support and high definition (HD) voice quality makes it cost effective for enterprise employees and middle managers.

Basic call features like Call Hold, Call Park, Call Transfer, etc., and advanced features like Voicemail, Call Logs, Phonebook, Busy Lamp Field, Do Not Disturb, etc., for users to communicate in a simple and flexible way.

H81 IP phone also supports multifarious auto provisioning methods, such as FTP, TFTP, HTTP, HTTPS, DHCP OPT66, SIP PNP, TR069. Besides, when H81 is to be deployed with ZYCOO CooVox V2 series IPPBX (Firmware 3.0) it can be provisioned by simply enter a 3-digit Quick Register Code from the keypad. Deploying massive IP phones will never be so time and effort-saving.



CooFone H81 Specifications

Items		Specifications
Screen		128x48 dot-matrix with backlight
HD Handset		RJ9
Network Interfaces	Network	10/100Mbps(802.3AF POE Class 1 Enabled (H81P))
	PC	10/100Mbps (Bridged to network)
HD Hands-free Speaker		0~7KHz
HD Hands-free Microphone		0~7KHz
RJ9 Phone port		Handset
		Headset
Keypad (31 keys)		4 Soft-keys
		7 Function keys
		4 Navigation keys + 1 OK key
		12 Standard Phone Digits keys
		2 Volume Control keys, Up/Down
		1 Hands-free key
Power Input		DC 5V/0.6A
Power Consumption	Idle	1.3W
	Peak	4.3W
Working Temperature		0~40°C
Working Humidity		10~65%
Installation		Desktop
		Wall-mount
Color		Black
Package Dimension		260x255x62mm (L x W x H)

Feature Highlight

Call Features

- Answer / Reject Calls
- Mute / Unmute (microphone)
- Call Hold / Resume
- Call Waiting
- Intercom
- Caller ID Display
- Speed Dial
- Anonymous Call (Hide Caller ID)
- Call Forwarding (Always/Busy/No Answer)
- Blind / Attended Call Transfer
- Call Parking / Pick-up
- Redial/Auto-Redial
- Do-Not-Disturb (per line / per phone)
- Auto-Answering (per line)
- 3-way Conference
- Hot Line

Phone Features

- 2 SIP Lines
- HD Voice
- Handset / Hands-free / Headset mode
- Phonebook (500 entries)
- Remote Phonebook (XML/LDAP)
- Call log (600 entries, in/out/missed)
- Black/White List Call Filtering
- Message Waiting Indication (MWI)
- Programmable Soft keys
- Network Time Synchronization
- Action URL / Active URI
- Industrial Standard Certifications: CE/FCC

Audio

- HD Voice Microphone/Speaker
- Wideband ADC/DAC 16KHz Sampling
- Codecs: G.711a/u, G.723.1, G.726-32K, G.729AB, G.722
- Full-duplex Acoustic Echo Canceller (AEC)
- Voice Activity Detection (VAD)
- Comfort Noise Generation (CNG)
- Background Noise Estimation (BNE)

- Noise Reduction (NR)
- Packet Loss Concealment (PLC)
- Dynamic Adaptive Jitter Buffer up to 300ms
- DTMF: In-band, Out-of-Band – DTMF-Relay(RFC2833) / SIP INFO

Networking

- 10/100Mbps Ethernet, dual bridged port for PC bypass
- IP Configuration: Static / DHCP / PPPoE
- Network Access Control: 802.1x
- VPN: L2TP (Basic Unencrypted) / OpenVPN
- VLAN
- QoS

Protocols

- SIP2.0 over UDP/TCP/TLS
- RTP/RTCP/SRTP
- STUN
- DHCP
- PPPoE
- 802.1x
- SNTP
- FTP/TFTP
- HTTP/HTTPS
- TR069

RFCs

- 354/1321/1350/1769/1889/1890/2131/2132/2616/2617/2661/2833/2976/3261/3262/3263/3264/3265/3268/3311/3489/3711/4346/4566/5630/5865

Deployment & Maintenance

- Auto-Provisioning via FTP/TFTP/HTTP/HTTPS/DHCP/PT66/SIP PNP/TR069
- Web Management Portal
- Web-based Packet-dump
- Configuration Export / Import
- Phonebook Import/Export
- Firmware Upgrade
- Syslog

CooFone H83 IP Phone



ZYCOO CooFone H83 IP Phone is a high-end enterprise desktop IP phone which comes with 4 SIP accounts support, 2.8 inch LCD screen, 4 programmable softkeys and intelligent DSS Key-mapping to increase enterprise users' productivity at a cost-effective price.

High definition (HD) voice quality and all basic and advanced VoIP call features support. Users will enjoy every single call with CooFone-H83.

H83 IP phone also supports multifarious auto provisioning methods, such as FTP, TFTP, HTTP, HTTPS, DHCPPT66, SIP PNP, TR069. Besides, when H83 is to be deployed with ZYCOO CooVox V2 series IPPBX (Firmware 3.0) it can be provisioned by simply enter a 3-digit Quick Register Ccode from the keypad. Deploying massive IP phones will never be so time and effort-saving.

CooFone H83 Specifications

Items		Specifications
Screen		2.8 inch (320x240) LCD color-screen
HD Handset		RJ9
Network Interfaces	Network	10/100Mbps(802.3AF POE Class 1 Enabled)
	PC	10/100Mbps (Bridged to network)
HD Hands-free Speaker		0~7KHz
HD Hands-free Microphone		0~7KHz
RJ9 Phone port		Handset
		Headset
Keypad (39 keys)		8 DSS key with tri-color LED
		4 Soft-keys
		7 Function keys
		4 Navigation keys + 1 OK key
		12 Standard Phone Digits keys
		2 Volume Control keys, Up/Down
Power Input		DC 5V/0.6A
Power Consumption	Idle	1.3W
	Peak	4.3W
Working Temperature		0~40°C
Working Humidity		10~65%
Installation		Desktop
		Wall-mount
Color		Black
Package Dimension		260x255x62mm (L x W x H)

Feature Highlights

Call Features

- Answer / Reject Calls
- Mute / Unmute (microphone)
- Call Hold / Resume
- Call Waiting
- Intercom
- Caller ID Display
- Speed Dial
- Anonymous Call (Hide Caller ID)
- Call Forwarding (Always/Busy/No Answer)
- Blind / Attended Call Transfer
- Call Parking / Pick-up
- Redial/Auto-Redial
- Do-Not-Disturb (per line / per phone)
- Auto-Answering (per line)
- 3-way Conference
- Hot Line

Phone Features

- 4 SIP Lines
- HD Voice
- Handset / Hands-free / Headset mode
- Phonebook (500 entries)
- Remote Phonebook (XML/LDAP)
- Call log (600 entries, in/out/missed)
- Black/White List Call Filtering
- Message Waiting Indication (MWI)
- Programmable Soft keys
- Network Time Synchronization
- Action URL / Active URI
- Industrial Standard Certifications: CE/FCC

Audio

- HD Voice Microphone/Speaker
- Wideband ADC/DAC 16KHz Sampling
- Codecs: G.711a/u, G.723.1, G.726-32K, G.729AB, G.722
- Full-duplex Acoustic Echo Canceller (AEC)
- Voice Activity Detection (VAD)
- Comfort Noise Generation (CNG)
- Background Noise Estimation (BNE)

- Noise Reduction (NR)
- Packet Loss Concealment (PLC)
- Dynamic Adaptive Jitter Buffer up to 300ms
- DTMF: In-band, Out-of-Band – DTMF-Relay(RFC2833) / SIP INFO

Networking

- 10/100Mbps Ethernet, dual bridged port for PC bypass
- IP Configuration: Static / DHCP / PPPoE
- Network Access Control: 802.1x
- VPN: L2TP (Basic Unencrypted) / OpenVPN
- VLAN
- QoS

Protocols

- SIP2.0 over UDP/TCP/TLS
- RTP/RTCP/SRTP
- STUN
- DHCP
- PPPoE
- 802.1x
- SNTP
- FTP/TFTP
- HTTP/HTTPS
- TR069

RFCs

- 354/1321/1350/1769/1889/1890/2131/2132/2616/2617/2661/2833/2976/3261/3262/3263/3264/3265/3268/3311/3489/3711/4346/4566/5630/5865

Deployment & Maintenance

- Auto-Provisioning via FTP/TFTP/HTTP/HTTPS/DHCP/PT66/SIP PNP/TR069
- Web Management Portal
- Web-based Packet-dump
- Configuration Export / Import
- Phonebook Import/Export
- Firmware Upgrade
- Syslog